


IOVU-751R

MIPS-based Panel PC

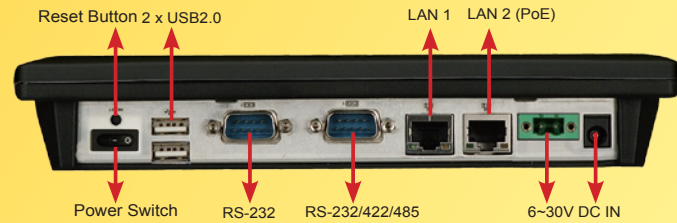

Intranet Internet

PoE

Power Sourcing Ethernet Switch

Wireless LAN Access Point

IP Camera

VoIP Phone

RMI
Raza Microelectronics, Inc.

Windows CE 5.0

Linux

MIPS
TECHNOLOGIES

Features

- Processor includes MAE (Media Acceleration Engine) supports MPEG 1/2/4 and WMV9
- RISC-based processor provides high performance and extremely low power consumption
- PoE (Power over Ethernet) function
- 7" widescreen WGA TFT LCD with resistive touch screen
- Compact design with plastic housing
- Fanless system
- Built-in 1.5W speakers
- Secure Digital card slot for storage expansion
- IP64 compliant front panel

Packing List

1 x IOVU-751R
1 x Utility CD includes application tools, SDK, and technical document
1 x Null modem cable
1 x Touch pen
1 x Screw kit

Ordering Information

Part No.	Description
IOVU-751R-CE5/R10	7", WGA fan-less touch panel PC with RMI Alchemy AU1250 CPU, 256MB DDR2 SDRAM, LAN supports PoE function and built-in Windows® CE5.0 Operating System
IOVU-751R-UX/R10	7", WGA fan-less touch panel PC with RMI Alchemy AU1250 CPU, 256MB DDR2 SDRAM, LAN supports PoE function and built-in ARM-Linux 2.6.11 Operating System

Options

Part No.	Description
AFLPK-12	Panel mount kit
AFLWK-12	VESA 75 wall mount kit
ARM-11-RS	LCD Monitor/PPC Arm kit loading capacity from 3kg~7kg
STAND-A08-RS	LCD Monitor/PPC Stand kit for VESA 75 and support up to 5 Kg
VSTAND-A07	LCD Monitor/PPC STAND V type for VESA 75, 0~90 degree adjustable hinge and support up to 2.5 Kg
AFLP-12BMSR-U	USB Magnetic Card Reader
AFLP-BRW01-U / AFLPBRB01-U	USB Barcode Reader (White / Black)
AFLP-CDB01 / AFLP-CDW01	VFD Customer Display (Green) 5 x 7 dot matrix (Black / White)
63000-FSP060DBAB1553-RS	Adapter Power; FSP;FSP060-DBAB1;Active PFC;Vin:90~264VAC;60W;Dim:62*110*31.5mm;Plug:9.5mm;Cable=1500mm;Erp(NO LOAD 0.5W);Vout:12VDC;Φ2.5/Φ5.5;CCL;RoHS
63000-FSP060DBAB1555-RS	12V/5A DC 60W power adapter with bare wire, 90~264V AC input

IOVU-751R Dimensions (Unit: mm)

