




## COM Express® Type 6 Rugged Ultra Lite Carrier

Connect Tech's COM Express® Type 6 Rugged Ultra Lite Carrier Board is a compact carrier board which matches the dimensions of a COM Express® Basic module and offers the ultimate durability with rugged, locking pin header connectors. COM Express® Type 6 Ultra Lite Carrier Board is ideal for space constrained applications, harsh environments, demanding conditions and supports extended temperature ranges of -40°C to +85°C.

**COM Express®**

**Product Name:** COM Express® Type 6 Rugged Ultra Lite Carrier  
**Part Number:** CCG011

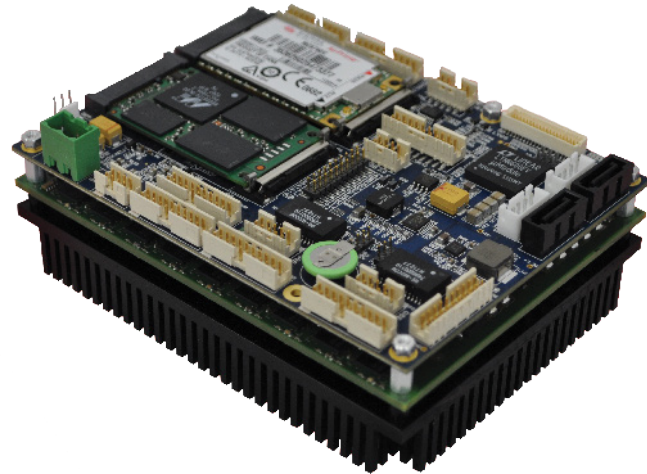

### Specifications

<b>Compatibility</b>	COM Express® Type 6 Modules PCIMG COM Express® COM.0 R2.0
<b>Mini-PCIe Expansion</b>	2 x half or full length cards Both sockets have PCIe, USB and SATA signaling for mSATA operation 1 x SIM Card Expansion
<b>Storage</b>	4 x SATA ports: 2 x mSATA 2 x External Vertical Locking Connector
<b>Network</b>	2 x Gigabit Ethernet (10/10/1000) Ports 1 from COM Express 1 from on-board Intel 82574I PHY/Controller
<b>GPIO</b>	8-bit GPIO
<b>USB</b>	8 x USB 2.0 Ports (2 used for miniPCIe)
<b>Display</b>	2 x DisplayPort++ (DDI) interface - which can be used for DisplayPort, HDMI, DVI or VGA 1 x VGA (Analog/CRT) 1 x LVDS interface (single ch 24-bit, dual ch 48-bit)
<b>Audio</b>	HD Audio (Cirrus Logic CS4207 codec) 1 x stereo input 1 x stereo output
<b>Serial</b>	1 x Console RS-232 port (TX/RX) 2 x RS-232 (w/ full modem signals) 2 x RS-422/485
<b>Miscellaneous External Faces</b>	SMBus I2C Battery Low Indication PC speaker Interface System Status (S3 and Reset Outputs)
<b>Power</b>	Input: Single +12V input +/- 5% (5mm pitch terminal connector) On-board RTC Battery 3V 48mAh (with option to select from RTC external battery)
<b>I/O Connectors</b>	All low-profile shrouded locking ruggedized 2mm pitch headers. Can be mated to panel mountable cable set or MIL type connectors.
<b>Weight</b>	TBD
<b>Temperature</b>	-40°C to +85°C
<b>Dimensions</b>	125mm x 95 mm
<b>Support</b>	Lifetime warranty and free technical support

### FEATURES

- ✓ Ruggedized, locking pin header connectors
- ✓ COM Express type 6 compatibility
- ✓ Mini-PCIe Expansion
- ✓ Supports latest processor sets, including 4th Generation Intel® Core™ i7 (Haswell)
- ✓ Extended Temperature Range

**RoHS**

Specifications subject to change without notice.  
©2012, Connect Tech Inc. All trademarks are property of their respective holder.

**Connect Tech Inc.**  
42 Arrow Road  
Guelph, ON Canada  
**Tel:** 519.836.1291  
**Fax:** 519.836.4878

**Toll:** 800.426. 8979 (NA)  
**Email:** sales@connecttech.com  
**www.connecttech.com**

CTIX-00107.0.00 - 07.31.13